

Tenda



All for better networking.

TEG5310P-8-150W

L3 Managed PoE Switch

www.tendacn.com



TEG5310P-8-150W

L3 Managed PoE Switch

Products Description

TEG5310P-8-150W is a Tenda Layer-3 managed PoE switch. To meet the demand of high-performance access, the switch provides 9 10/100/1000 Mbps Base-T Ethernet ports and 1 separate 1000 Mbps Base-X SFP ports, and a PoE power of up to 130 W. With an innovative hardware structure and software platform, it features a powerful processing capacity and complete security protection mechanism, making management and maintenance easy and simple, fully meeting the demands of high-density user access and high-performance aggregation, ideal for the aggregation layer or access layer of such medium to large networks as enterprises and campuses.

Product Features


- Comply with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3z, IEEE 802.3x, IEEE 802.1p, IEEE 802.1q, IEEE 802.1w, IEEE 802.1d, IEEE 802.1s, IEEE 802.3af/at standards
- 9 x 10/100/1000 Base-T Ethernet ports, 1 separate 1000 Base-X SFP ports
- 16 K MAC address table and MAC address auto-learning
- Maximum PoE output power of a single port: 30 W, maximum PoE output power of the whole switch: 130 W
- Supports abundant services, such as static routing, VLAN, IGMP, QoS, ACL, DHCP Snooping, ARP and Telnet
- Built-in 6 kV professional lightning protection power, 19 inch/1 u standard rack-mounted design

Key Features




Dual 6 kV professional lightning protection

Provides dual 6 kV port and power lightning protection, and supports multiple protection features, such as PSE short circuit protection, PoE overload protection, power over-temperature and overvoltage protection, and surge current protection.



Layer-3 routing protocol

Supports Layer-3 static routing protocol, meeting the demand of the 3-layer networking environment in which Layer-3 networks should be interconnected while Layer-2 networks should be isolated, thus realizing an efficient and fast layer-3 routing forwarding



150W PoE power supply

Offers 8 gigabit PoE ports complaint with IEEE 802.3af and IEEE 802.3at. With a maximum 130 W PoE output power of the whole switch, and a maximum 30 W PoE output power of a single port, the switch helps provide stable power and data transmission for gigabit WLAN and high definition digital monitoring devices



Sound security features


Supports IP address filtering, MAC address filtering, ARP filtering, DoS attack defense, and ACL access control list, improving network security



Map visualization

Supports auto discovery of ONVIF based ip-camera and access point, support automatically topology generate.

Application

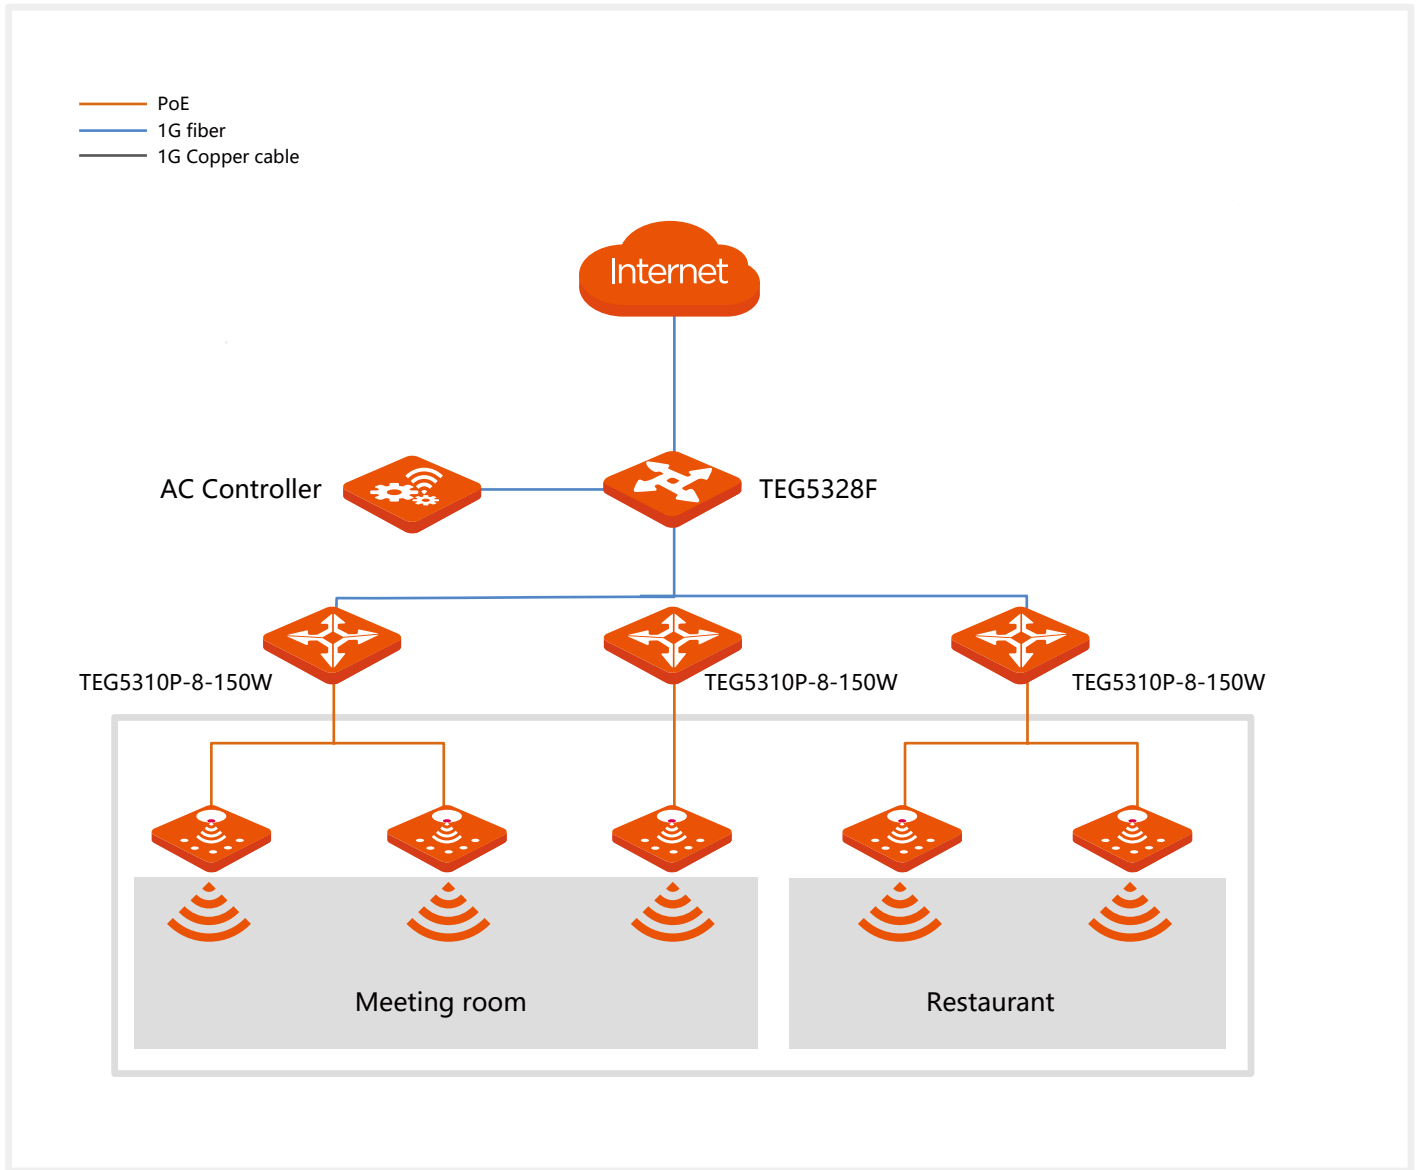

Specifications

Hardware specifications	
Network standards	IEEE802.3、IEEE802.3u、IEEE802.3ab、IEEE802.3z、IEEE802.3x、IEEE802.3af/at、IEEE802.1p、IEEE802.1q、IEEE802.1w、IEEE802.1d、IEEE802.1s
LED indicators	<ul style="list-style-type: none"> One Link/Act or PoE LED indicator for each port One Link/One Link/Act mode converting LED indicator for each device One PoE mode converting LED indicator for each device One PoE Max LED indicator for each device One Power LED indicator for each device One SYS LED indicator for each device
Fixed ports	<ul style="list-style-type: none"> 8 x 10/100/1000 Base-T Ethernet ports (Data/Power) 1 x 10/100/1000 Base-T Ethernet ports (Data) 1 x 1000 Base-X SFP ports (Data)
Lightning protection	≥6 kV
Forwarding mode	Store-and-forward
MAC address table	16K
PoE power supply	Ports 1 to 8 support IEEE 802.3af/at standard PoE power supply 1 2 4 5 +, and 3 6 7 8 -
Input voltage	100-240V ~ 50/60Hz
Dimensions	294 mm x 179.6 mm x 44 mm
Whole switch consumption	Whole switch consumption: <150W Maximum PoE output power: 130 W
Operating environment	<ul style="list-style-type: none"> Operating temperature: 0°C - 40°C Storage temperature: -40°C - 70°C Operating humidity: (10% - 90%)RH, non-condensing, Storage humidity: (5% - 90%)RH, non-condensing
Software specifications	
PoE power supply management	<ul style="list-style-type: none"> Supports port PoE configuration and power supply with priority Supports PoE over-temperature protection Supports PoE scheduled management Supports intelligent management and PoE-powered device detection (port status, power assignment and PoE-powered device status)
Security features	<ul style="list-style-type: none"> ARP receiving limit Unknown MAC address discard DoS attack defense 802.1x security authentication Radius security authentication
VLAN	<ul style="list-style-type: none"> IEEE 802.1Q VLAN VLAN Layer-3 interfaces Supports three port modes: Access, Trunk and Hybrid
DHCP	<ul style="list-style-type: none"> DHCP Server DHCP Relay DHCP Snooping Supports Option 82 policy configuration

Specifications

Software specifications

L3 Routing	VLAN-based routing IPv4 static routing adding Static ARP adding/deleting ARP aging time configuration
Port aggregation	Static aggregation LACP dynamic aggregation
Spanning tree	IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) Supports edge port Supports BPDU statistics
Multicast	IGMP Snooping V1/V2/V3 Supports port fast leave
Port Mirroring	Supports N: 1 port mirroring
QoS	SP (Strict Priority) SWRR (Simple Weighted Round Robin) WRR (Weighted Round Robin) Supports 802.1p port trust mode Supports DSCP port trust mode Supports a maximum of 8 queue service quality mapping
ACL	Supports MAC ACL and IP ACL
Loading and upgrade	Supports FTP/TFTP/HTTP upgrade Supports configuration import and export
Management and maintenance	Supports Telnet, Console Supports SNMP V1/V2/V3 Supports WEB management and maintenance Supports Ping/Tracert/Connection Detection Local visualization management
Certificates	CCC、FCC、CE、RoHS

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Technology Bldg.Int' I E-City,
#1001 Zhong Shan Yuan Rd.,Nanshan District,Shenzhen China.

E-mail:support@tenda.com.cn

Tel:+86-755-2765 7098

Fax:+86-755-2765 7178