

# FINNSAT

## Fiber to Ethernet Media Converter


Speed	Fiber	Mode	Distance
10/100M 10/100/1000M	Single Dual	SM MM	850m 3km 25km





## Media Converter

## Fiber + PoE Solution

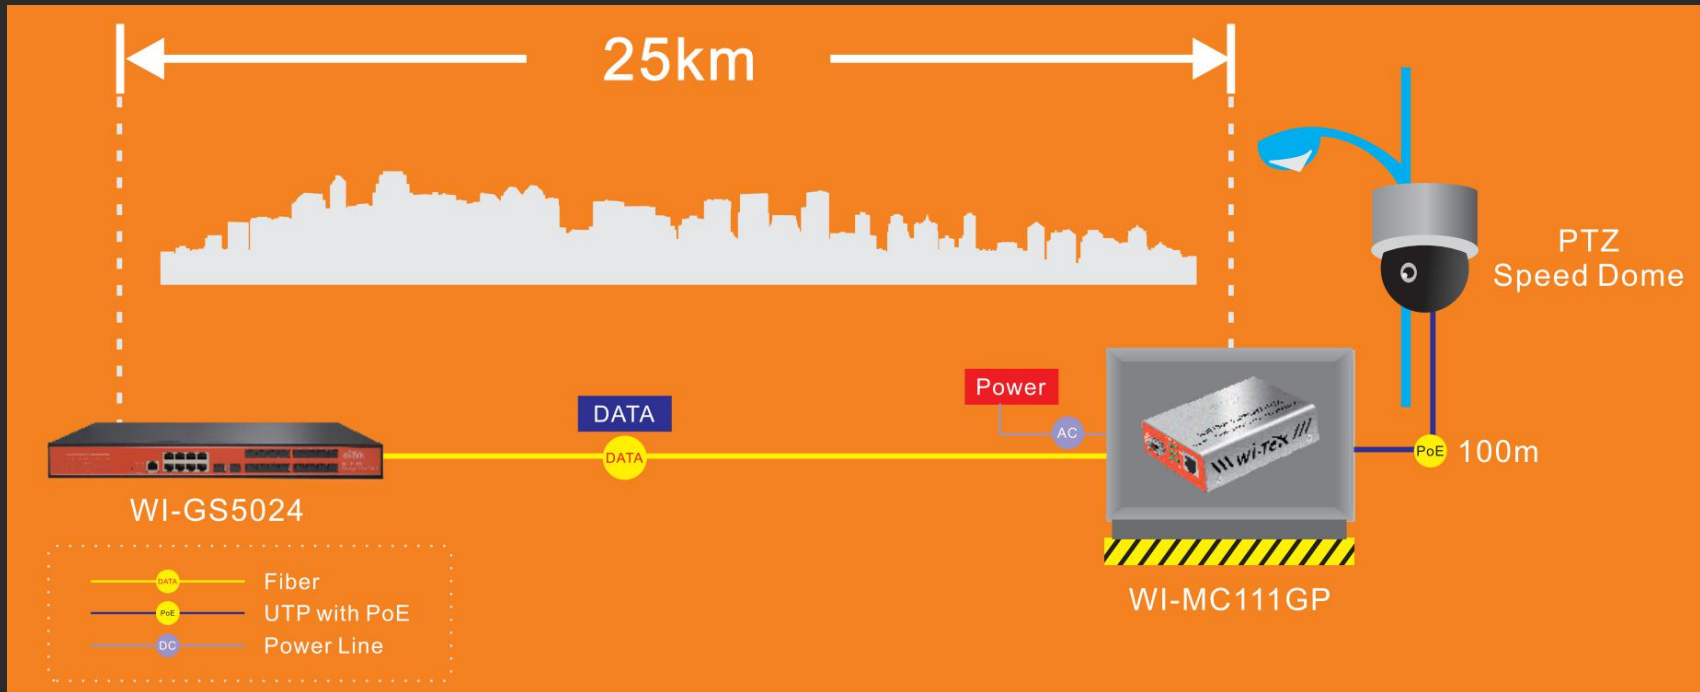

## Media Converter



### Qualcomm Inside

Qualcomm chip inside ensures stable transmission, stable performance and strong anti-interference ability.

- Lightning protection.
- Strong anti-jamming ability.
- High speed and stability signal conversion.



### Easy to View

High visibility LED indicators indicate status to easily monitor network activity.



### Heat dissipation

Made of high quality metal housing, durable and durable with long life, provide better heat dissipation, suitable for indoor and outdoor work.

- Operating temperature: 0 ° C to 70 ° C
- Storage temperature: -45 ° C to 80 ° C

## Media Converter



50000  
Hours

### High-performance

- Mean time between failures > 50000 hours.
- 2Mbit RAM for data buffer
- Supports jumbo frame size 9 KB



100V  
~  
240V

### 100V ~ 240V voltage

- Support 100V ~ 240V voltage range
- DC: 5V DC 1.0A
- Power consumption: ≤3 watts



PLUG  
AND PLAY

### Plug-and-Play

- Plug-and-play, no additional software required.
- Modulation configuration design, support hot swap.