



**WI-PS210G-O V2**  
**11-Port Outdoor Waterproof PoE Switch**  
**with 8 PoE port**  
**Data sheet**


## Highlights


- 11 Ports outdoor PoE Switch with 8-Port PoE ports(6FE+2GE) and 2GE+1SFP uplink ports
- IP65 weatherproof enclosure, -30-70°C working temperature
- Support PoE watchdog for PD alive check
- All-in-one for easy installation
- Port 1-6 supports PoE IEEE 802.3af/at 30W for compliant PDs, Port 7-8 support 802.3bt 60W PoE Output
- 6KV PoE surge protection
- 10KV AC surge protection

## Product



## Typical Applications

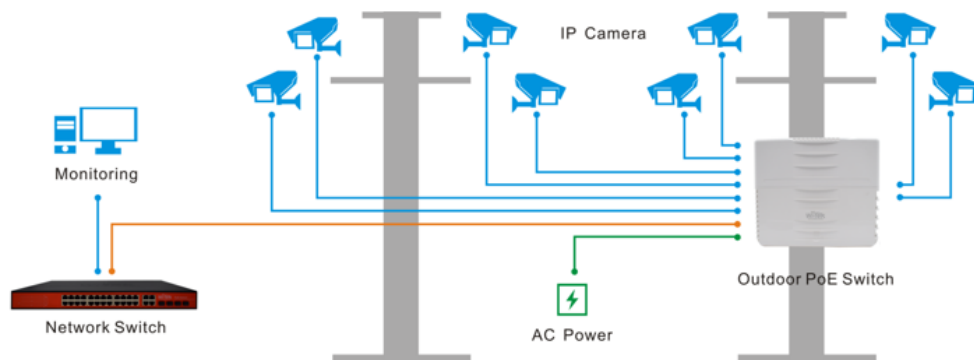

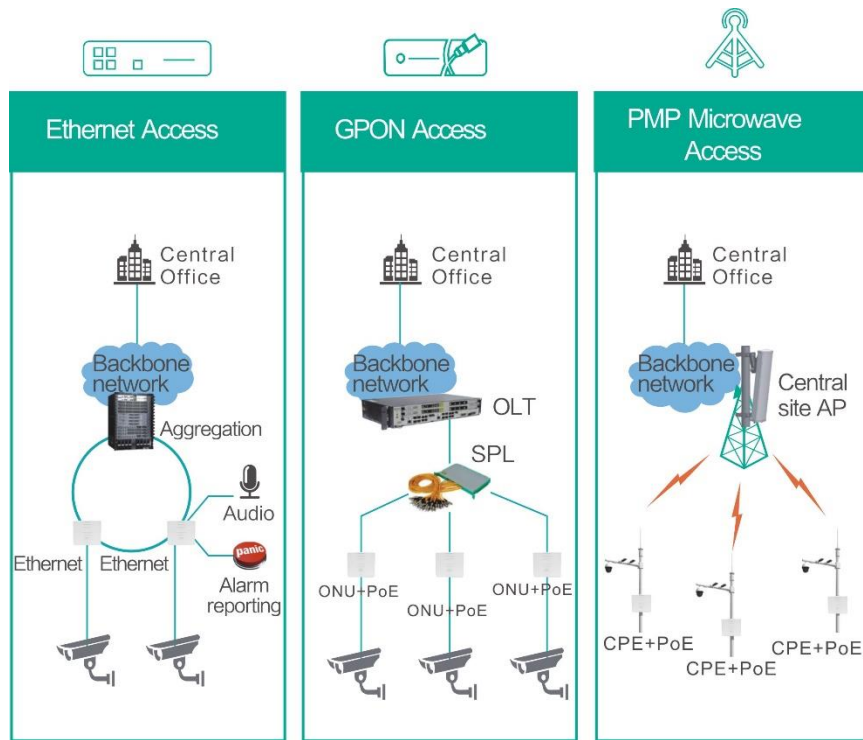

## Description

WI-PS210G-O is a 11-port switch with 8-port PoE. IP65 weatherproof enclosure makes it

an ideal choice for outdoor CCTV application. It is made of durable, high-quality plastic. Inside of the enclosure. The device has 8 PoE port for connecting PoE IP camera, which can both transmitting data and powering for camera. You no longer have to lay extra power cable to the NVR. This will allow you to save on materials and working. WI-PS210G-O provides you a cost-effective outdoor CCTV solution.

## Specification

## HARDWARE FEATURES

<b>Interface</b>	6*100M RJ45 POE Ports 2*1000M RJ45 POE Ports 2*1000M RJ45 Uplink Port 1*1000M SFP Port
<b>Network Media</b>	10Base-T: Pair 2 Category 3(cat 3) and above UTP/STP(≤100m) 100Base-TX: Pair 2 Category 5(cat 5) and above UTP/STP(≤100m) 1000BASE-TX: 6 Category and above UTP(≤150m)
<b>Fan Quantity</b>	Fanless
<b>Internal Power Supply</b>	AC 110~240V 50/60HZ 120W Power Budget
<b>PoE Ports (RJ45)</b>	PoE Ports: Port1- Port6 802.3af/at 30W PoE Ports: Port7- Port8 802.3bt 60W
<b>Exchange Capacity</b>	11.2Gbps
<b>Mac Address Table</b>	4K
<b>Packet Forwarding Rate</b>	8.33Mpps
<b>Buffer</b>	1.5Mb
<b>Jumbo Frame</b>	10240Bytes

<b>Dimensions</b>	Product Size: 310mm*260mm*100mm (L*W*H)
-------------------	---

SOFTWARE FEATURES	
<b>Transmission Method</b>	Store-And-Forward
<b>Advanced Functions</b>	Priority Function Mac Address Auto-Learning And Auto-Aging Store and forward IEEE 802.3x flow control for Full-duplex Mode Backpressure for Half-duplex Mode

OTHERS	
<b>Certification</b>	CE, FCC, RoHS
<b>Package Contents</b>	PoE Switch Electric Line Guide Book/Warranty Card Wall mounting KIT Pole mounting KIT Screws
<b>Environment</b>	Working Temperature: -30°C~70°C Working Humidity : 10% ~ 90% RH



**WIRELESS-TEK TECHNOLOGY LIMITED**  
[www.wireless-tek.com](http://www.wireless-tek.com)  
 Email: [sales@wireless-tek.com](mailto:sales@wireless-tek.com)  
 Technical Support: [tech@wireless-tek.com](mailto:tech@wireless-tek.com)