



WI-PS326GF
24GE+2SFP 48V Ports PoE Switch
with 24-Port PoE
Data sheet


Highlights



- 24GE+2SFP Full Gigabit Switch with 24 PoE ports
- Supports PoE power up to 30W for each port
- Supports PoE IEEE 802.3af/at compliant PDs
- Internal power adapter supply 400W output power
- Support port VLAN(Port isolation) mode
- LED indicators for LINK/ACT, Power, PoE Status, 100/1000Mbps
- 8K entry MAC address table with auto-learning and auto-aging

Product



Typical Applications

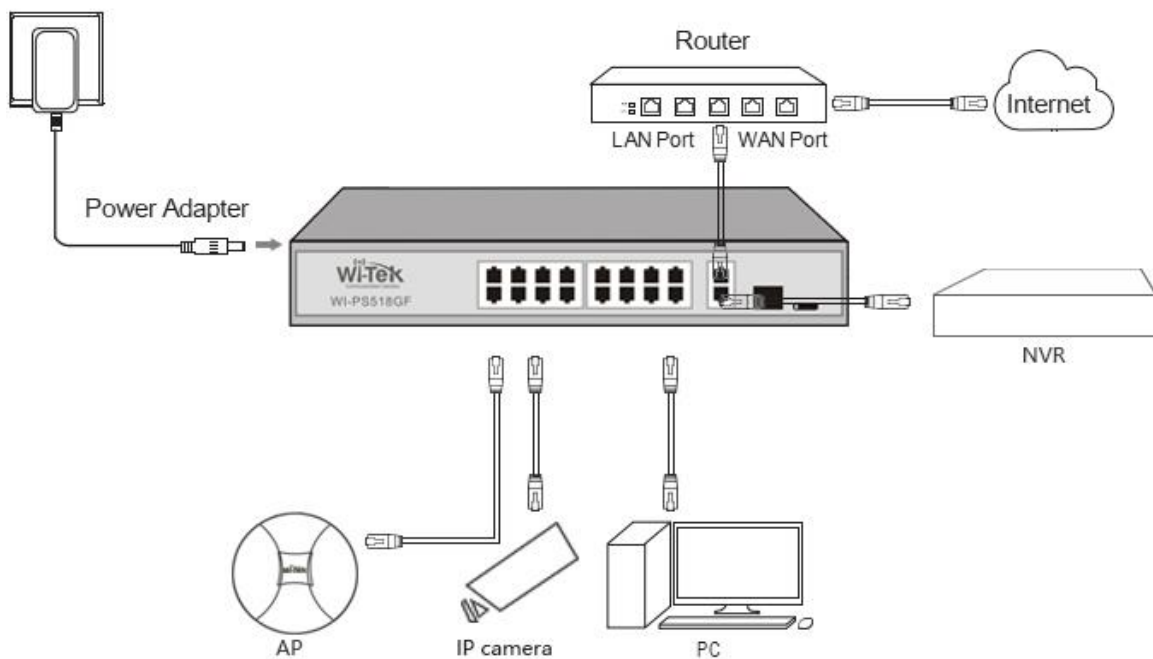

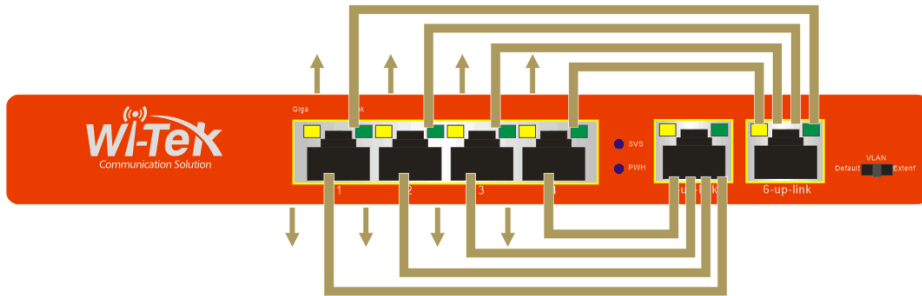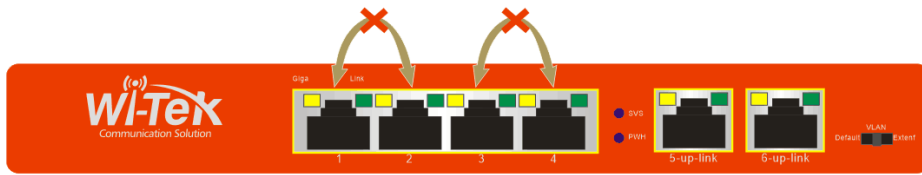

Description

What This Product Does

24GE+2SFP Port Gigabit Switch with 24-Port PoE provides the seamless network connection. It integrates 1000Mbps Gigabit Ethernet and 10/100Mbps Fast Ethernet network capabilities.

How This Product Works

24 Auto-Negotiation RJ45 ports (port-1 to port-24) of the switch support Power over Ethernet (PoE) function. These PoE ports can automatically detect and supply power with those IEEE 802.3af/at compliant Powered Devices (PDs). In this situation, the electrical power is transmitted along with data in one single cable allowing you to expand your network where there are no power lines or outlets, where you wish to fix devices such as APs, IP Cameras or IP Phones, etc.

Easy To Use

WI-PS326GF is easy to install and use. It requires no configuration and installation. With outstanding performance and quality, the WI-PS326GF 24GE+2SFP Port Gigabit Switch with 24-Port PoE is a great selection for expanding your home or office network.

Specification

HARDWARE FEATURES

Interface	24 1000M POE Ports 2 SFP Uplink Ports
Network Media	10Base -T:Pair 2 Category 3(Cat3) and above UTP/STP(≤100m) 100Base-TX: Pair 2 Category 5(Cat5) and above UTP/STP(≤100m) 1000Base-T: Pair 4 Category 5(Cat5e) and above UTP/STP(≤100m) 1000Base-SX:62.5μm/50μm MMF(2m~550m) 1000Base-LX:62.5μm/50μm MM(2m~550m) or 10μm SMF(2m~5000m)
Fan Quantity	2 Fan
Power Budget	400W
Internal Power Supply	AC 110~240V 50/60HZ
PoE Ports (RJ45)	Standard: 802.3 af/at compliant PoE Ports: Port1- Port24 Power Supply: 400W
Exchange Capacity	52G
Mac Address Table	16K
Packet Forwarding Rate	38.7Mpps

Buffer	12Mb
Jumbo Frame	10240Bytes
Dimensions	Product Size: 440mm*290mm*45mm (L*W*H)
Protection Leve	Lightning protection 6KV 6KV ESD Contact discharge
OTHERS	
Certification	CE, FCC, RoHS
Package Contents	POE Switch Electric Line Rack-Mount Kit Foot Pad Guide Book/Warranty Card
Environment	Operating Temperature: -10°C~55°C



WIRELESS-TEK TECHNOLOGY LIMITED
 www.wireless-tek.com
 Email: sales@wireless-tek.com
 Technical Support: tech@wireless-tek.com